

EPOS



ADMIN GUIDE

EPOS Connect (VDI)

INSTALLATION PROCEDURE FOR DELL WYSE THINOS

How to enable EPOS Connect on Dell Wyse ThinOS¹:

Create a plain-text file with the EPOS Connect configuration details.

Example:

```
log_filepath = ...
tenant_filepath = ...
log_output ...
log_level = ...
proxy_setting = ...
tenant_id = ...
tenant_url = ...
```

Commands description:


Command	Description
log_filepath	Specifies the log file path.
tenant_filepath	Specifies the tenant configuration and device settings file path.
log_output	Specifies where the log entries are to be saved. Default is set to CONSOLE. Change the value to FILE if you want to write log entries to a log file.
log_level	Specifies the log level. Default is set to OFF. Change the value to one of the following options as per your preference: <ul style="list-style-type: none"> • TRACE • DEBUG • INFO • ERROR • WARN • EXCEPTION • OFF
proxy_setting	Specifies the proxy server.
tenant_id	Specify the tenant ID of EPOS Manager ²
tenant_url	Specify the tenant URL of EPOS Manager

¹ EPOS Connect is available for Dell Wyse ThinOS 9.1 and higher.


² EPOS Manager is the management suite provided by EPOS. For more information about EPOS Manager and sign-up please visit www.eposaudio.com/en/dk/enterprise/software/epos-manager

If enabling EPOS Connect from Admin Policy tool:

1. Copy the Plain-text file to a USB disk.
2. Plug in the USB disk to ThinOS client.
3. On ThinOS, open the Admin Policy Tool then go to “Advanced” → “Peripheral Management” → “Device Headset Settings”.

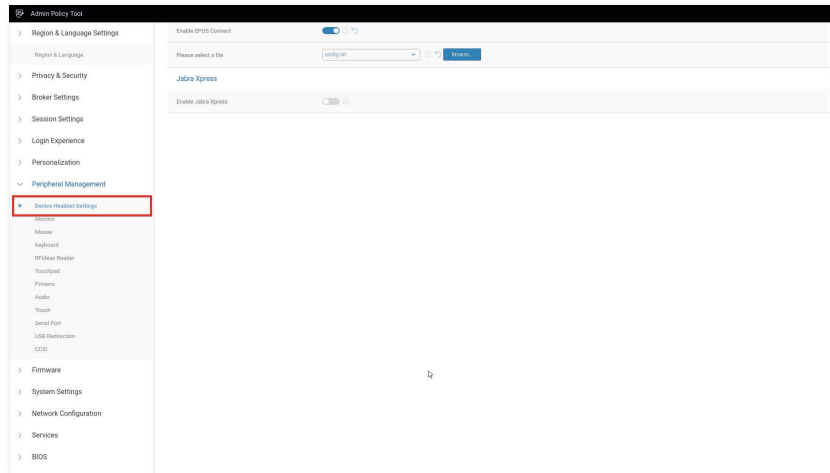


4. Click the “Enable EPOS Connect” toggle switch.

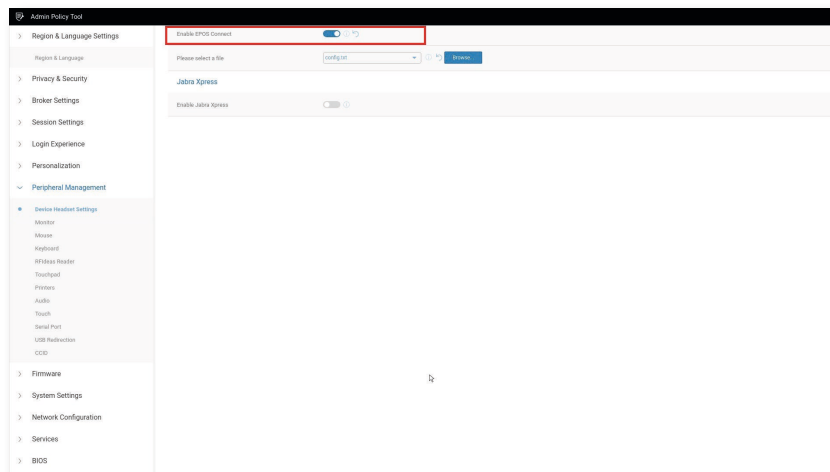


5. Browse and upload the configuration file.
6. From the drop-down list, select the uploaded configuration file.
7. Click Save & Publish.
8. Restart the thin client for changes to take effect.

If enabling EPOS Connect from WMS:


1. In WMS server go to the “Groups & Configs page”, click the icon “+”.

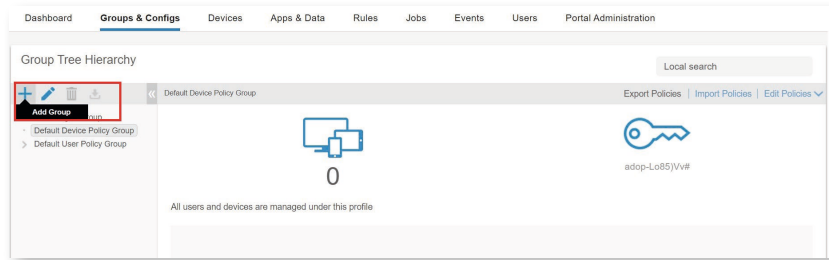


2. Define group settings.
3. From the “Edit Policies” drop-down menu, click “ThinOS 9.x”.

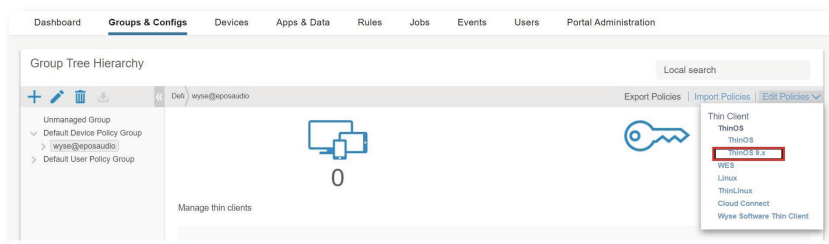

4. Go to “Advanced” → “Peripheral Management” → “Device Headset Settings”.

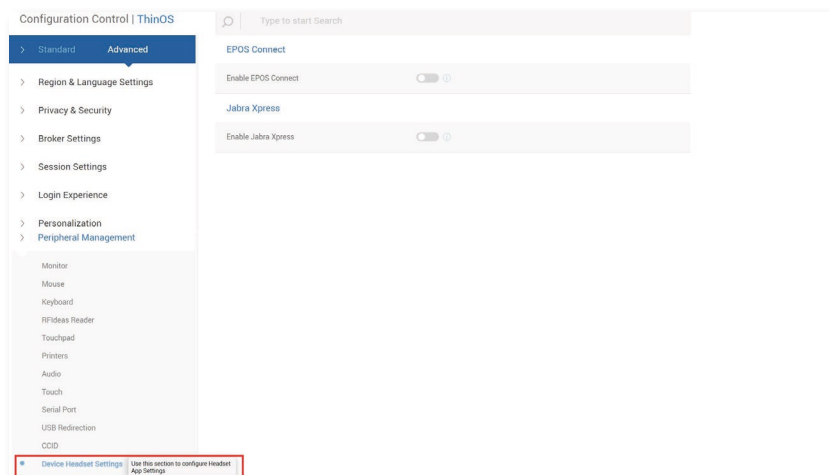

5. Click the “Enable EPOS Connect” toggle switch.

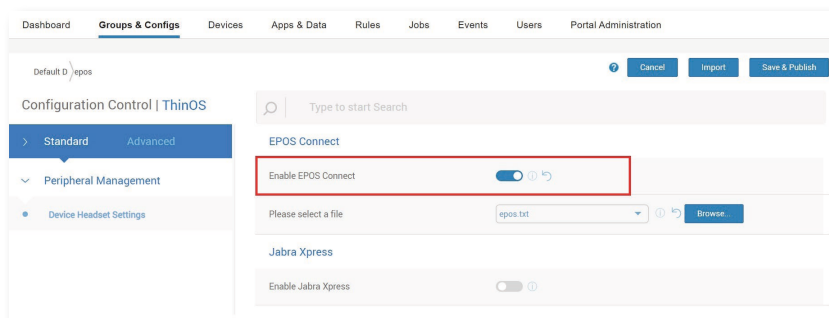

6. Click the “Browse” button, select the plain-text file and click “Open”.
The file will be uploaded to the WMS server.
7. Select the plain-text file in “Configuration File” list and click the “Save & Publish” button.
8. Click OK on the pop-up Alert window.
9. Restart the thin client for changes to take effect.

Contact information

Support Portal: Eposaudio.com/enterprise-support
E-mail: software-help@eposaudio.com
Phone: Find your local support phone number and opening hours here below.

ASIA-PACIFIC
Australia
T +61 2 9910 6700
8:00 – 17:00

China
T +86 1057319666
9:00 – 18:00

**Hong Kong S.A.R.,
China**
T +85 234128400
9:00 – 18:00

India
T 1 800 200 3632
9:00 – 18:00

Japan
T +81 364 068 919
9:00 – 18:00

New Zealand
T +64 (9) 580 0489
8:00 – 17:00

Singapore
T +65 6408 5143
9:00 – 18:00

South Korea
T +82 1544 1699
10:00 – 18:00

EUROPE
Austria
T +43 720880857
8:00 – 17:00

Belgium
T +32 28080784
8:00 – 17:00

Denmark
T +45 89882841
8:00 – 17:00

Finland
T +358 942450352
8:00 – 17:00

France
T +33 170610386
8:00 – 17:00

Germany
T +49 3030808045
8:00 – 17:00

Hungary
T +36 14088056
8:00 – 17:00

Iceland
T +353 15262572
8:00 – 17:00

Ireland
T +353 15262572
8:00 – 17:00

Luxembourg
T +352 27860234
8:00 – 17:00

Netherlands
T +31 20-8080956
8:00 – 17:00

Norway
T +47 23961052
8:00 – 17:00

Russia
T 8800-1008557
8:00 – 17:00

Spain
T +34 911238085
8:00 – 17:00

Sweden
T +46 844680895
8:00 – 17:00

Switzerland
T +41 315281132
8:00 – 17:00

United Kingdom
T +44 2035144072
8:00 – 17:00

LATIN AMERICA
Brazil
T +55 1143807556
8:00 – 17:00

Mexico
T +52 5553502401
8:00 – 17:00

NORTH AMERICA
Canada
T 1-800-895-7412
8:00 – 17:00

United States
T 1-800-895-7412
8:00 – 17:00

MIDDLE EAST/AFRICA
United Arab Emirates
T 800 035703844
8:00 – 17:00